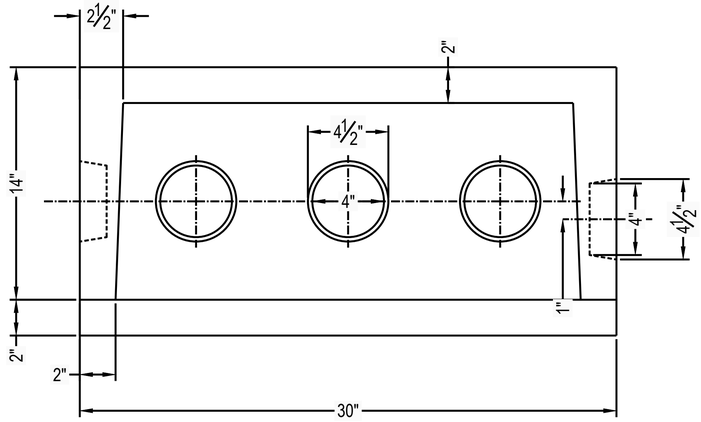

DESIGN DATA:

1. EARTH COVER = 3 FEET MAX
2. CONCRETE MINIMUM COMPRESSIVE STRENGTH = 5,090 PSI @ 28 DAYS
3. REINFORCED WITH 6 X 6 W10.0 X W10.0 WELDED WIRE FABRIC.
4. ALL CONCRETE SURFACES ABOVE THE LIQUID LEVEL ARE COATED WITH AIRLESS ASPHALT.

CASTING WEIGHTS

WEIGHT OF LID:	76.2 LBS
WEIGHT OF TANK:	220.1 LBS
TOTAL CASTING WEIGHT:	296.3 LBS

SEPTIC TANK CAPACITY:

0.6 GALLONS PER INCH
TOTAL VOLUME = 7.2 GALLONS

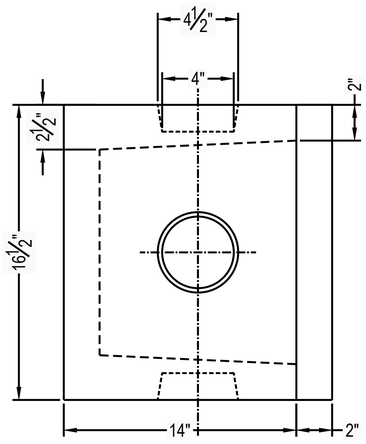

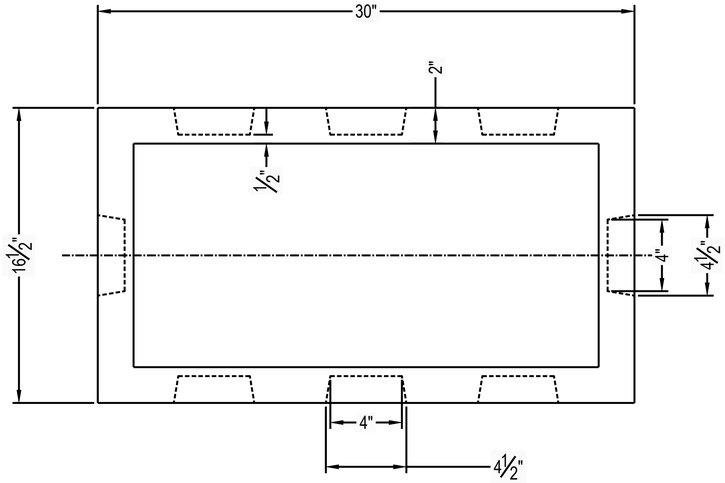

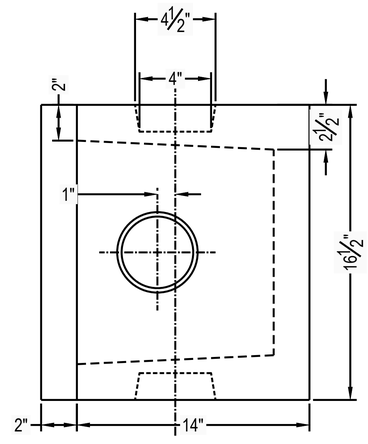

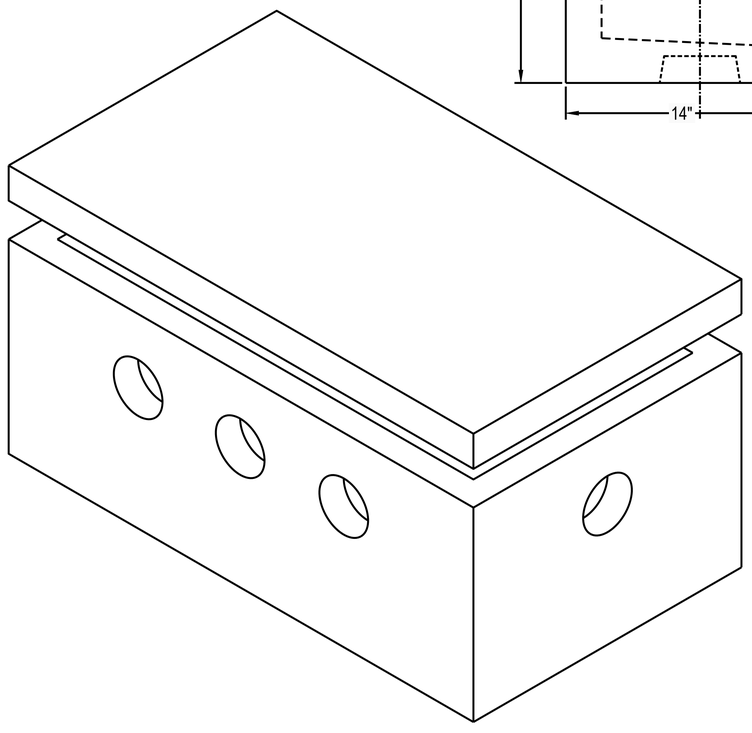

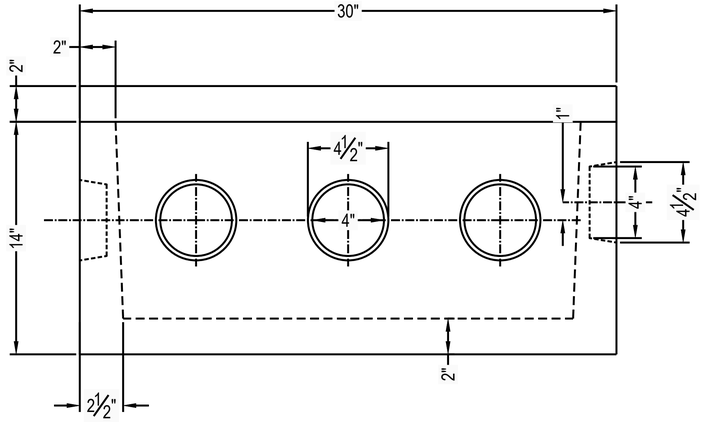

** ALL RENSSELAER SEPTIC TANKS ARE MONOLITHICALLY POURED **

This drawing is the property of Rensselaer Septic Tanks. It is submitted for reference purposes only. © 2008 Rensselaer Septic Tanks

RENSSELAER SEPTIC TANKS

1211 North Weston Street
P.O. BOX 70
Rensselaer, Indiana 47978
phone: (219) 866-5063
(800) 240-5123
fax: (219) 866-3894

PROJECT NAME
CLIENT NAME
ADRESS

PROJECT NO:	---
FILE:	8 HOLE D BOX.DWG
DRAWN BY:	ASJM, CDB
CHECKED BY:	PEW

TITLE:
MANUFACTURER'S DETAIL DRAWING
8 HOLE DISTRIBUTION BOX
NO TRAFFIC

R-000